



BILLBOARDS



COVERS



TENTS

## *Finish 2 Sides AT ONE TIME*


The DH7600 is designed to finish the outside edges of almost any size product. This welder is an economical solution to simultaneously finish 2 sides at one time and will accommodate almost any seam type. The DH7600 is available with an optional conveyor table for additional fabric handling.

### **Hot Air Welding Applications:**

- Woven Polypropylene
- Woven Polyethylene
- PVC Laminate
- PVC Coated
- Polyurethane Coated
- Polypropylene and More

# DH7600

## Seam Types

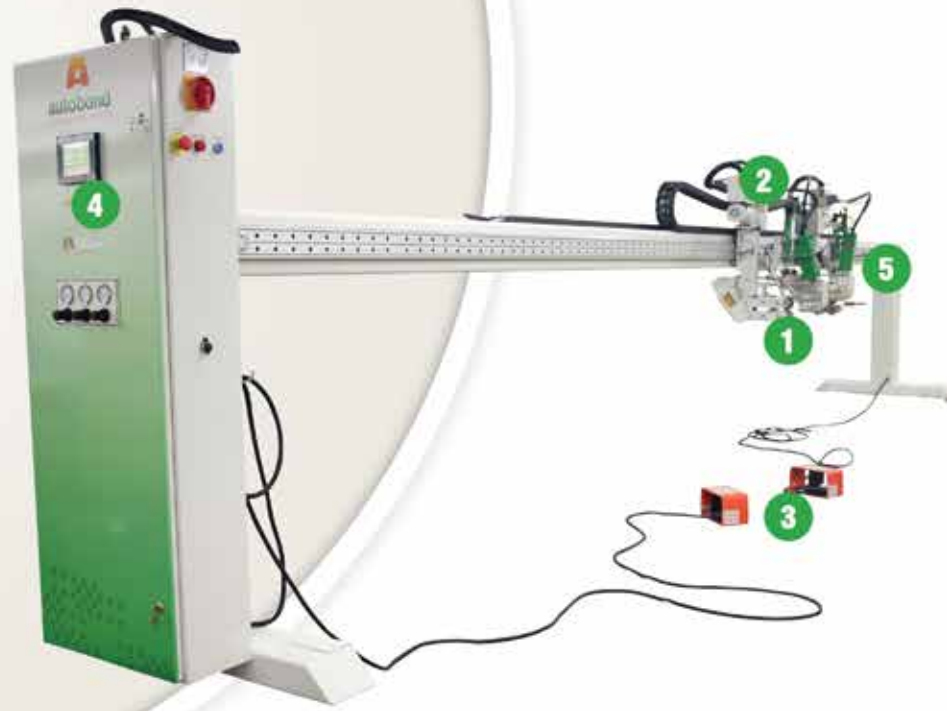

## Technical Specifications

**Power Requirements:** 380-400 Volts – Three Phase, Plus Neutral – 40 Amperes  
208-240 Volts – Single or Three Phase – 60 Amperes

**Power Consumption:** 14.4Kw or 16Kw

**Air Requirements:** 100PSI @ 1 CFM

**Throat Capacity:** 4.5M (14.76ft) or 7.6M (24.93ft)

**Seam Width:** 12mm – 50mm (.5in – 2in)

**Welding Speed:** Up to 18M/min ( 60ft/min)\*

\* Depending on the application, the seam width and the type of material used

## FEATURES & BENEFITS

1. Dual hot air and hot wedge heat systems for seaming any type of industrial fabric.
2. Adjustable welding heads for multiple width products.
3. Operator foot pedal to initiate welding process while heads assist with material as needed.
4. PLC touch screen for simple control and multiple recipe storage for quick setting recall.
5. Single operator capability for decreasing labor costs.